

GEOPHONE

THE MOST RELIABLE MECHANICAL LEAK DETECTOR AVAILABLE

SUGGESTIONS FOR USING THE GEOPHONE


The Geophone is widely used and recognized as the most reliable mechanical leak detector available. For best results, place the sensing head firmly against the surface being explored. While it does not have to be on a horizontal plane, the instrument works best when it is free standing, since the circulation of blood in the hands will set up detectable vibrations. The instrument performs equally well on soil, ice, hard packed snow, pavement or any solid substance. Light packed snow or grassy surfaces tends to distort or muffle the leak sounds. In these cases it is suggested that you dig down to solid ground or drive a metal rod into the ground, leaving approximately two inches of the rod above the ground. Place the disc on top of the rod and listen. In addition to the rush of water you will sometimes hear an erratic clicking sound. This is caused by rocks and gravel banging against the pipe in the high pressure stream of leaking water. Remember that the Geophone is designed and built for detection of vibrations in solid substances—not in gaseous media.

LOCATING LEAKS

Using drawings or pipe locators, first find the exact location of the main. Begin searching in the spot where you most suspect the leak to be. Place the sensing heads on the ground above the main, spaced approximately three feet apart. The sounds you hear may reach one ear sooner than the other. By moving the heads you will reach a spot where the sound is of the same intensity in both sensing heads and reaches both ears at the same time. You are now directly above the leak site.

MAINTENANCE

The Geophone is an extremely sensitive sound conductor. To insure the instrument's long life and proper functioning treat it gently. Dropping or shaking the sensing heads or dragging them along the ground by the tubes will damage the instrument, impeding the sensing head's performance. Periodically check the tubes to assess if they have been damaged by kinking. We recommend that you keep the tubes attached to the Geophone at all times to prevent small particles of dust from penetrating the diaphragms. Always store and transport the Geophone in its sturdy wooden case. Following these few maintenance procedures will be years of satisfactory service.

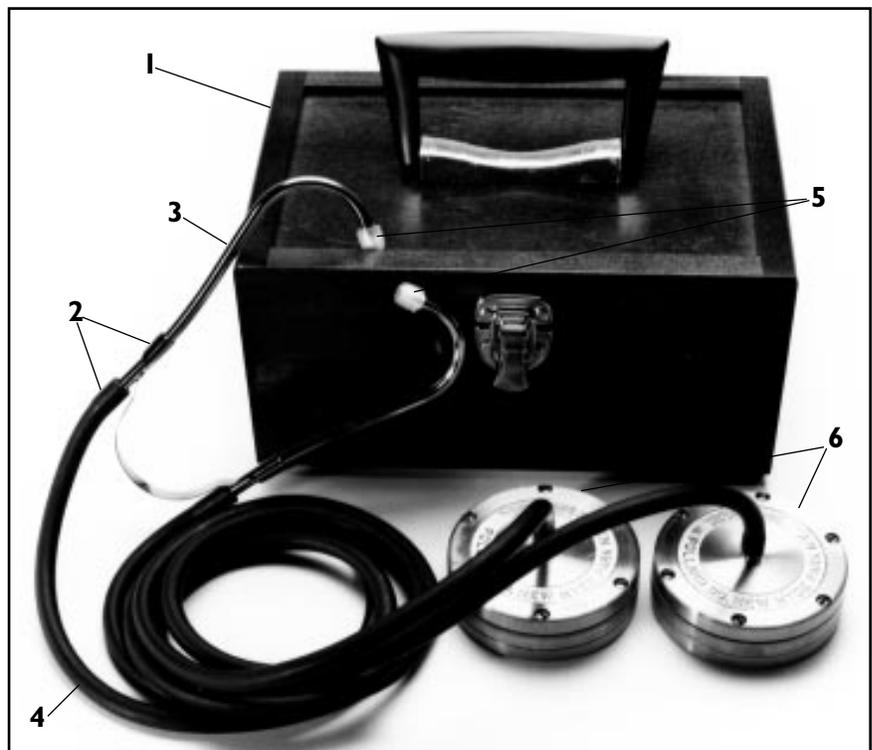

Order No.	Description
P512	Geophone w/Carrying Case.
P51201	Geophone less Carrying Case
P51202	Carrying Case (1)
P51210	Complete Headset (2)
P51211	Stethoscope Headset w/Tips (3)
P51212	Tubing, 4' (4)
P51213	Ear Tips, Pair (5)
P51214	Sensing Head (6)

YOUR SOURCE FOR CUSTOM MANUFACTURED TOOLS FOR THE WATERWORKS INDUSTRY



JOSEPH G. POLLARD CO., INC.
200 ATLANTIC AVENUE • NEW HYDE PARK, NY 11040
TEL: 800-437-1146 FAX: 516-294-6898