

CHECK OUT OUR  
TOP FLUSHING  
PRODUCTS

**Pollardwater™**

(800) 437-1146 | POLLARDWATER.COM

## FLUSHING SELECTION



**TRUCKFLUSH™  
DIFFUSER**  
*PTRUCKFLUSH*  
See page 2



**HYDRANTPRO™ KIT**  
*PPHYDPROKIT*  
See page 4



**SINGLE JACKET FIRE  
HOSE 2-1/2" X 15'**  
*A2130250015NSTALRL*  
See page 8

**TOP  
PICKS  
INSIDE**

## DECHLORINATION

Pollardwater



PLPD250



PLPD250ALUM



PLPD PITOTKIT



PLPD TABLETSCREEN

### LPD-250 DECHLORINATING DIFFUSERS

- Diffuse the flow of the hydrant and trap debris
- Flow Rate: 200–1250 gpm
- Allows you to measure flow with optional pitot (PLPD PITOTKIT)
- Neutralize chlorine/chloramines (10 ppm or less)
- Designed for use with LPD-CHLOR™ or VITA-D-CHLOR™ (tablet screen required with VITA-D-CHLOR™)
- Attach the LPD-250 (ALUM) directly to a hydrant or the end of a hose
- Comes standard with a 2-1/2" FNST inlet
- Alternate inlet threads available
- Available in lightweight aluminum (yellow) or steel construction (orange)
- Works great with SHO-FLOW® Bluetooth Flow Meter (see page 5)

#### SKU

PLPD250

PLPD250ALUM

PLPD PITOTKIT

PLPD TABLETSCREEN

PW0000010

#### Type

Steel Diffuser

Aluminum Diffuser

Pitot Kit

Tablet Screen


LPD-Chlor™ Tablets

Pollardwater



### TRUCKFLUSH™ DIFFUSER

- Allows for high velocity flushing to maximize scouring power of water mains
- Flow Rate: Up to 2500 gpm
- Connects to a 2" square receiver hitch
- 4" Female Quick Connect Inlet (2-1/2" FNST inlet adapter sold separately)
- Dechlorinates potable water (2 ppm Cl<sub>2</sub> or less) with the addition of a PTFE DECHLORKIT and Vita-D-Chlor™ Tablets
- Removable top allows for easy access to dechlorination basket
- Designed and tested for use with Vita-D-Chlor™ Tablets
- Includes 15' red rubber hose, 4-1/2" female NST x 4" male quick connect coupling
- Works great with SHO-FLOW® Bluetooth Flow Meter (see page 5)



#### SKU

PTRUCKFLUSH

PTFE DECHLORKIT

#### Type

TruckFlush Diffuser with Hose

TruckFlush Dechlor Kit Add-on

VITA-D-CHLOR™



### VITA-D-CHLOR™ TABLETS

- 100% organic vitamin C chemistry
- Tablets contain 75% ascorbic acid (vitamin C) to quickly neutralize chlorine and chloramines in water, waste water and process water
- No effect on dissolved oxygen in receiving bodies of water
- For use in all types of tablet feeders and diffusers
- Shelf Life: 3 years in ideal conditions

#### SKU

PVITADCHLOR

PVITADCHLOR20

PVITADCHLOR40

PVITADCHLOR140

#### Pkg Qty

6

20

40

140

Pollardwater



## DECHLORINATION MATS

- Dechlorination mats are reusable and simple to use
- For use with most dechlorination tablets
- Size: 36" x 48"
- Number of Pockets: 24
- Great for emergencies where other dechlorination devices aren't practical
- Heavy-duty, reinforced polyester/nylon material with grommets

SKU	Color
PDECHLORMAT	Black
PDECHLORMATHV	High-Visibility Orange

Pollardwater



## SUPER DECHLORPRO™

- Designed for dechlorination of high chlorine concentration projects
- Flow Rate: Up to 1250 gpm
- For use with LPD-250 (ALUM) where the tablet chamber becomes the point of liquid chemical injection
- Ideal for new water main dechlorination
- Simple set up and operation
- Accommodates larger flow rates and high chlorine disinfection applications
- LPD-250 (ALUM) and PLDPITOTKIT sold separately

SKU	Type
PSUPERDECHLORPRO	Super Dechlorpro™
PCAPTOR5	CAPTOR® 5 Gallon



## CAPTOR®

- Active Ingredient: 30% Calcium Thiosulfate
- pH: 6.5-8.0
- Environmentally friendly
- Ready-to-use liquid; no chemicals to mix
- DOT safe; nonhazardous
- Will last more than a year when stored in ideal conditions

SKU	Size
PCAPTOR5	5 gal
TCAPTOR55	55 gal
ACAPTOR275	275 gal



## ZDe-CHLORINATOR NEMA 100

- Connection: 2-1/2" FNST
- Flow Rate: 150-900 gpm
- Dechlorinates up to 4 ppm chlorine
- Designed and tested for use with Vita-D-Chlor™ Tablets
- Lightweight aluminum with aircraft precision welds for durability
- Has adjustable diverter nozzle with removable diffuser
- No mixing, feed solution or rate valve to manage
- Weighs 14 lbs

SKU
PZDE100

DECHLORDEMON



## DECHLOR DEMON™

- Range: 0–50 ppm chlorine
- Low friction loss
- Conserves dechlorination agent
- Compact, short length means no added stress to hydrant nozzles
- Used in conjunction with the Hose Monster® diffuser
- Neutralize chlorine in water during testing or flushing without affecting flow test results or adding stress to hydrant nozzles
- Works off of flow and not a venturi

SKU	Connection	Flow Rate	Includes
HDD2H	2-1/2" FxM NST	500–1400 gpm	Mixing Tank; 1 gal
HDD4	4" FxM NST	1075–2940 gpm	Mixing Tank; 10 gal
HDD4H	4-1/2" FxM NST	1045–2865 gpm	Mixing Tank; 10 gal



## MD100 CHLORINE COLORIMETER

- Measure free (residual) and total chlorine for EPA compliance
- Range of 0.01-2.00 mg/L, 0.1-8.0 mg/L
- Features 16-point data recall and large, backlit LCD
- No separate light shield to misplace
- Waterproof, ergonomic design for field and lab use
- Includes DPD (100 free and 100 total tests), 10-mL sample cells, manual, case and batteries
- Optional accessories include a secondary standards kit and replacement DPD

SKU
TSC45010



Pollardwater



## HYDRANTPRO™ KIT

- All-in-one flow and pressure kit for 2-1/2" NST
- Max Flow: 2120 gpm
- Static pressure cap with 100 and 200 psi gauges
- Includes HydrantPro™ 160 diffuser, extra inner tubes, remote reader and carrying case

SKU

PPHYDPROKIT



## LITTLE HOSE MONSTER KIT

- Reads flows from 493-1305 gpm
- Includes 2" grooved pitotless nozzle
- 4" Pressure gauges - 0-100, 0-160 psi
- 2-1/2" FxM NST gate valve
- Static cap with swivel connection
- Hydrant and spanner wrench
- Case with wheels and telescoping handle
- Hose not included

SKU

HFFTKLH

Pollardwater



## ECONOMY FLOW TEST KIT

- Economy flow and pressure testing kit
- Everything you need to flow and pressure test for hydrants
- Includes handheld pitot, 2-1/2" FNST pin lug cap with bleeder valve, 2-1/2" 100 psi flow gauge, 2-1/2" 160 psi pressure gauge and quick-connect fittings, assembled in a case

SKU

PP672EK1

Pollardwater



## HYDRANTPRO™ DIFFUSERS

- Original hydrant flow and flushing diffuser
- Dual-read gauge on flow models
- Aluminum construction
- 2-1/2" FNST swivel connection

SKU

Type

Flow Rate

PHYDPRO100	HydrantPro™ 100	100 psi/1680 gpm
------------	-----------------	------------------

PHYDPRO160	HydrantPro™ 160	160 psi/2120 gpm
------------	-----------------	------------------

P190140075525	Carrying Case	-
---------------	---------------	---

Pollardwater



## PUMPER PORT DIFFUSERS

- Original hydrant flow and flushing lightweight aluminum swivel diffuser for large diameter hydrant ports
- Swivels to aim flow where discharged water will minimize property damage
- Lightweight aluminum swivel diffuser with gauge
- With Piezo tube assembly and 100 psi liquid-filled gauge
- Storz connections available

SKU

Type

End Connection

PP67514LF	Diffuser with Gauge	4" FNST
-----------	---------------------	---------

PP67502LF	Diffuser with Gauge	4-1/2" FNST
-----------	---------------------	-------------

P275160100313	Carrying Case	-
---------------	---------------	---

Pollardwater



## PROFESSIONAL FLOW TEST KIT

- Complete professional flow and pressure kit
- Includes handheld pitot, 2-1/2" FNST long handle cap with bleeder valve, 2-1/2" 100 psi and 160 psi flow gauges with quick connections, 3-1/2" 160 psi pressure gauge, hydrant flow gauge assembly 100 psi/gpm, 2-1/2" FNST flow nozzle and adjustable hydrant/spanner wrench, all assembled in a case

SKU

PP672FK1



#### AKRON FLOW TEST KITS

- Flow test kit with changeable tips for a variety of flows
- Flow Rate: 151-1,851 gpm
- 2-1/2" swivel FNST
- Includes 160 psi gauge, (5) outlet tips (1-1/2", 1-3/4", 2", 2-1/4", 2-1/2") and case

#### SKU

AFTKLK

Pollardwater



#### FLOW & PRESSURE KITS

- High-quality pressure kit with case
- Designed to test hydrants, hose bibbs and static pressure
- Max Flow: 1680 gpm
- Hose Bibb: 160 psi
- 2-1/2" FNST long-handled static cap with gauge
- Clamp on pitot with gauge
- GHT hose bibb tester can be pressed onto most fixtures

#### SKU

#### Max Flow

#### Hydrant Cap PSI

PP67206LF

160 psi

-

PP67234LF

-

160 psi



**NEW**



#### SHO-FLOW® BLUETOOTH FLOW METER

- 2-1/2" FxM NST
- Turbine generated power to supply Bluetooth® technology
- Includes free app for your smart device
- Can be added to most flushing devices to provide discharge gpm
- Can be used as an inline device for sensitive areas where friction loss is a concern
- Displays GPM, LPM, GPS or LPS options in real time
- App is an easy install from Google Play or the App Store

#### SKU

#### Flow Rate

TEFFNFN300

50 - 300 gpm

TEFJNJ500

100 - 500 gpm

TEFJNJ1250

500 - 1250 gpm



#### BIG BOY HOSE MONSTER KITS

- Kit includes Big Boy Hose Monster™, 4" dual read gauge psi/gpm, hydrant gate valve, remote reader, 2-1/2" cap with 160 psi gauge, hydrant wrench, spanner wrench and carrying case
- Flow Rate: 766 - 2708 gpm
- Hose not included

#### SKU

#### Hydrant Gate Valve Size

#### Hose Required

HFFTK4LH

4" FxM NST

A2160400010NSTRL

HFFTK45LH

4-1/2" x 4" FxM NST

HH45104

Pollardwater



#### HANDHELD PITOT

- (1) 3-1/2" liquid-filled gauge and carrying case
- Range: 0-200 psi
- Handheld pitot and hydrant flow testing
- Quick-disconnect makes easy work of switching gauges
- Durable chrome-plated finish for long wear
- Case has room for spare gauge (spare gauge not included)

#### SKU

PP65954



## MONARCH PRESSURE DATA LOGGER

- Great for recording pressures on hydrants or flow devices
- Using a logger on 1 or 2 hydrants, you can conduct a 2-hydrant flow test with 1 person—pressure readings on 1 logger and flow discharge on the other
- Free, easy-to-use Track-It™ software (Android platform only)
- Rugged, versatile and accurate
- Can be configured to record pressure and temperature or either parameter alone to maximize data storage space
- The sample storage rate can be set from 1 sample every 2 seconds to 1 sample every 24 hours
- 1/4" MNPT connection
- Includes: USB cable

SKU	Type
M53960302	0-350psi, 1/4" MNPT logger
PP67597T	Pin Lug Cap; 2-1/2" FNST, 1/4" FNST Tap
PP675012	1/4" 3-way bleeder valve

Pollardwater



## ECONOMY TEST CAPS & GAUGES WITH BLEEDER

- Cost-effective fire hydrant cap and gauge with bleeder valve
- This pin lug cap works with our standard hydrant wrench (PP66602)
- Material: Brass
- Includes 2-1/2" NST hose nozzle connection

SKU	Type	Pressure	Diameter
PP67021ECON	-	100 psi	2-1/2"
PP67022ECON	-	160 psi	3-1/2"
PP67023ECON	-	200 psi	2-1/2"
P1150000240	Carrying Case	-	-

Pollardwater



## HYDRANTPRO™ DIFFUSERS

- Hydrant flushing diffuser only (less gauge)
- Aluminum construction
- 2-1/2" FNST swivel connection
- Optional case P1901400075525

PHYDPROFLUSH

PP67519/PP67518

SKU	End Connection
PHYDPROFLUSH	2-1/2" FNST
PP67519	4" FNST
PP67518	4-1/2" FNST

Pollardwater



## TEST CAPS & GAUGES WITH BLEEDER

- Long-handle fire hydrant cap and gauge
- Bleeder valve allows user to vent air and water from hydrant before taking readings
- 3-1/2" liquid-filled gauge
- 1/4" MNPT bottom mount
- Brass internals
- Includes 2-1/2" FNST chrome hose nozzle connection

SKU	Type	Pressure
PP67021LF	-	100 psi
PP67022LF	-	160 psi
PP67023LF	-	200 psi
P1450000240	Carrying Case	-

HydrantSoftXL



## FLOW TESTING SOFTWARE

- Calculate your hydrant flow test
- For a single hydrant or entire distribution system
- Save your data to the cloud
- No annual cloud fee
- Can be used on your smart phone, computer iPad or table
- Print reports in PDF
- Ability to change orifice size and coefficients based on the flow device or hydrant nozzle size used
- Shows water used in gallons

SKU
SHYDRANTSOFTXL

Pollardwater

USA Made



## FLUSHPRO DIFFUSERS

- Allows you to move the water away from the hydrant or discharge pump to help reduce property damage
- Keeps your hose on the ground for your personal safety
- Made from heavy-duty, lightweight PVC pipe
- A length of fire hose is required for proper function

SKU	End Connection
PPFLUSHPRO	2-1/2" FNST
PFLUSHPROXL	4-1/2" FNST



## HOSE MONSTER

- Classic steel flushing Hose Monster®
- Cancels the thrust
- Can be used with tablet and liquid dechlorinators
- Flow Rate: Up to 1500 gpm
- End Connection: 2-1/2" FNST swivel inlet
- Flushing unit only can be upgraded with pitot system

### SKU

HHM2HF



## HOSE MONSTER

- Constructed out of steel with a precision machined internal orifice plate for accurate and consistent flow rates
- Flow tests will never be interrupted due to rocks and flushing debris flowing through the unit
- End Connection: 4 1/2" FNST
- Flow Rate: 1047-2867 gpm
- Gauge not included
- Weight: 45 lbs
- FM-approved

### SKU

HHM4H

Pollardwater

## MANHOLE FLUSH STAND



- Meets cross connection air gap requirements
- High visibility safety orange
- Allows flow to go directly into manhole or catch basin
- End Connection: 2-1/2" FNST
- Keeps street clear of standing water and reduces customer complaints
- Will fit 23"-30" manholes
- Works great with SHO-FLOW® Bluetooth Flow Meter (see page 5)

### SKU

PMHFLUSHSTAND



## PVC FLUSHING ELBOWS

- 45° flushing diffuser elbow
- End Connection: 2-1/2" FNST
- Economical
- For flushing only
- Lightweight
- Use 2 units for higher discharge

### SKU

W323DIR

Pollardwater



## TRUCK-MOUNTED DIFFUSERS

- Female inlet swivels for left or right hookups
- Connects to a 2" square receiver hitch
- Can be mounted from top or bottom
- Eliminates the need to mount a diffuser at each hydrant
- Can be used with tablet and liquid dechlorinators
- Works great with SHO-FLOW® Bluetooth Flow Meter (see page 5)

### SKU

PKOMODONST

PGODZILLER

### Type

2-1/2" Komodo with Nitrile Rubber Hose; 2-1/2" FxM NST, 15'

4-1/2" Godziller with Nitrile Rubber Hose; 4-1/2" FNST x 4" MQC, 15'



Pollardwater



## KEMX PRESSURE GAUGES

- End Connection: 1/4" MNPT
- Temperature Range: -4°F–150°F
- Diameter: 2-1/2"
- Range: 0-100 psi
- Intervals: 1.0psiF
- Vibration-resistant; glycerin-filled
- Rugged Zytel nylon case
- KEMX models are clog and freeze-resistant
- High-quality shock and wear-resistant industrial gauge
- Accuracy:  $\pm 1.0\%$  of span
- Not approved for potable water applications

SKU

T4106425

Pollardwater



## HYDRANTPRO™ REPLACEMENT GAUGES

- Replacement HydrantPro gauges

SKU	Type	Flow Rate
T6109099	PSI Only	300 psi
T6106990	Replacement Gauge	100 psi/1680 gpm
T6107134	Replacement Gauge	160 psi/2120 gpm

ABBOTT RUBBER  
COMPANY, INC.



## SINGLE JACKET FIRE HOSES

- Specifically for flushing and flow testing
- 2-1/2" FNST X 2-1/2" MNST
- Max Pressure: 250 psi
- Aluminum rocker lug fittings
- Ozone-resistant tube
- Material: Rubber, polyester
- Custom lengths and threads are available upon request

SKU	Length
A213025005NSTALRL	5'
A2130250010NSTALRL	10'
A2130250015NSTALRL	15'
A2130250025NSTALRL	25'
A2130250050NSTALRL	50'

TRANSDUCERS  
direct



## DATA LOGGER

- New data logging wireless pressure gauge
- Bluetooth® certified wireless pressure transducer
- Long battery life
- Data logging capability to save pressure data that can be opened in an Excel spreadsheet
- Free app works on Android, iOS current version and previous
- iPad, iPhone and more
- End Connection: 1/4" MNPT
- Battery Life: Supply 3.6V Proprietary replacement battery, 24 months, typical

SKU

TTDWLBDL0250034



## WIKI PRESSURE GAUGES

- Most economical option
- Diameter: 4"
- End Connection: 1/4" MNPT
- Temperature Range: -40°F–140°F
- Vibration-resistant; glycerin-filled
- Stainless steel case
- Not approved for potable water applications
- Accuracy (4"):  $\pm 1\%$  (ASME B40.1 Grade 1A)

SKU	Range	Intervals
W50144278	0–60 psi	1.0 psi
W50144014	0–100 psi	2.0 psi
W50144022	0–200 psi	5.0 psi

ABBOTT RUBBER  
COMPANY, INC.



## DOUBLE JACKET FIRE HOSES

- Designed for interior fire fighting and flow testing
- 2-1/2" FNST X 2-1/2" MNST
- Max Pressure: 400 psi
- Aluminum rocker lug fittings
- Ozone-resistant tube
- Material: Rubber, polyester
- Custom lengths and threads are available upon request

SKU	Length
A215025005NSTALRL	5'
A2150250010NSTALRL	10'
A2150250015NSTALRL	15'
A2150250025NSTALRL	25'
A2150250050NSTALRL	50'



**ABBOTT**<sup>®</sup>RUBBER  
COMPANY, INC.


### NITRILE RUBBER-COVERED FIRE HOSES

- Ideal for high-pressure applications
- Aluminum rocker lug fittings with FxM NST
- Rubber cover helps prevent cuts and abrasions and is oil resistant
- Custom lengths and threads are available upon request

SKU	Fittings Sizes	Length	Max Pressure
A2160250005NSTALRL	2-1/2"	5'	300 psi
A2160250010NSTALRL	2-1/2"	10'	300 psi
A2160250015NSTALRL	2-1/2"	15'	300 psi
A2160250025NSTALRL	2-1/2"	25'	300 psi
A2160250050NSTALRL	2-1/2"	50'	300 psi
A216040005NSTALRL	4"	5'	250 psi
A2160400010NSTALRL	4"	10'	250 psi
A216050005NSTALRL4	4-1/2"	5'	200 psi
A2160500010NSTALRL	4-1/2"	10'	200 psi



### HYDRANT PUMPER PORT GATE VALVES

- Low friction loss
- Slow open/close
- Hard anodized gate and stainless steel spindle for best corrosion protection
- Material: Lightweight aluminum alloy

SKU	Inlet	Thread Pattern	Outlet	Thread Pattern
HH80040NHM40NH	4"	FNST	4"	MNST
HH8004040NH	4"	Storz	4"	FNST
HH80045NHM45NH	4-1/2"	FNST	4-1/2"	MNST
HH8005045NH	5"	Storz	4-1/2"	FNST



### RIGID FEMALE TO MALE ADAPTERS

- Hard-coated to resist corrosion and abrasion
- Rocker lug fittings
- Material: Lightweight aluminum alloy

SKU	Inlet	Thread Pattern	Outlet	Thread Pattern
AAA137212NH4NH	2-1/2"	FNST	4"	MNST
AAA137212NH412NH	2-1/2"	FNST	4-1/2"	MNST
AAA1374NH212NH	4"	FNST	2-1/2"	MNST
AAA1374NH412NH	4"	FNST	4-1/2"	MNST
AAA137412NH212NH	4-1/2"	FNST	2-1/2"	MNST
AAA137412NH4NH	4-1/2"	FNST	4"	MNST



### BRASS HYDRANT GATE VALVE

- Features rubber seal, speed handle, non-rising stem and rocker lug swivel
- 2-1/2" FxM NST
- Made in the USA


SKU	Lead Free
DHGV250F	No
S123PF250AM250ALF	Yes



### ALUMINUM HYDRANT GATE VALVES

- Excellent for hydrant and other water control
- Max Pressure: 250 psi
- 2-1/2" FxM NST
- Spinning knob on hand wheel for easy open/close
- Built-in slow close safety operation
- Lightweight anodized aluminum for corrosion resistance
- Stainless steel spindle

SKU
HHHGV25NH25NH



### RIGID FEMALE TO MALE ADAPTERS

- Pin lug fittings
- Material: Brass

SKU	Inlet	Thread Pattern	Outlet	Thread Pattern
PP673	2-1/2"	FNST	3/4"	MGHT
DHA2510T	2-1/2"	FNST	1"	MNPT
PP67304	2-1/2"	FNST	1-1/2"	MNPT
PP67305	2-1/2"	FNST	2"	MNPT
DHA4025F	4"	FNST	2-1/2"	MNST
DHA4525F	4-1/2"	FNST	2-1/2"	MNST

## HYDRANT ACCESSORIES



### KUPFERLE ECLIPSE #9700 PORTABLE AUTOMATIC FLUSHING STATION

- Flush dead end mains automatically
- Maintain consistently safe residuals
- Lockable, secure aluminum enclosure
- Connection: 2-1/2" NST
- Pressure: 220 psi
- Battery: 9V
- Material: Aluminum
- Approved Green Project Funding Program

SKU	Flow Rate	Valve Size	Color
K9700ARED	65 gpm	1"	Red
K9700AYEL	65 gpm	1"	Yellow
K9700RED	200 gpm	2"	Red
K9700YEL	200 gpm	2"	Yellow

Pollardwater



PP66602



PP66604

### HYDRANT WRENCH & SPANNER

- Opens hydrants with up to 1-3/4" pentagon or 1-1/4" square nuts
- Can be used on both pin lug and rocker lug connections
- Heavy-duty forged head with zinc coating
- 15" carbon steel non-slip handle with knurled grip
- Meets ASTM 1020 specifications

SKU	Type
PP66602	Pin/Rocker Lugs
PP66604	Storz

Pollardwater

### 12 VDC PURGEPRO SUBMERSIBLE UTILITY PUMP



- Ideal for hydrants, meter pits and vaults that need to be drained
- Max Flow: 4.75 gpm
- Max Head: 42'
- Continuous duty rated
- Fresh and salt water rated
- Built-in strainer
- Plugs into your vehicle's 12V cigarette lighter with 13 foot of cable
- Includes 10' discharge hose and carry case

SKU	Type
PP69425	PurgePro
A3010050410	Replacement Hose



### HOSE RAMPS

- Ideal for use in road construction or by municipalities and contractors
- Sectional design for ease of portability
- Single set covers a standard traffic lane of 12'
- Built to withstand loads up to 47,500 lbs per wheel, these hose ramps will protect hose or cable while allowing uninterrupted traffic flow
- Center channel will accommodate up to 3" diameter hose without damaging the hose
- Serrated edges grab and hold; no sliding around like cheaper versions
- Nest together for storage
- Integral section clips snap together for tool-free assembly and disassembly
- Material: Lightweight aluminum alloy




SKU	Type
PHOSERAMPALHR	Hose Ramp
PRAMPCLIPS	(12) Clips for Hose Ramp

Pollardwater



### KINGLOCK K3 HYDRANT LOCK

- Low profile hydrant lock with white reflective band for increased visibility
- Add any padlock or barrel lock
- Corrosion-resistant, with stainless steel swivel hasp and set screws
- Fits hydrants that use a 1-1/2" pentagon operating nut
- Adapter available for 1-1/4" pentagon nuts

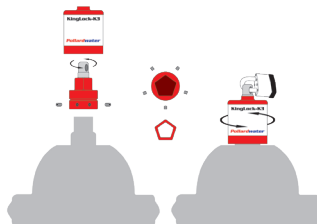

SKU	Type
PKINGLOCKK3	Hydrant Lock
PKINGLOCKINSERT	Adapter for 1-1/4" Pentagon Nuts

**NEW**



## FOOD-GRADE HYDRANT GREASE

- USDA H1 food-grade grease
- Size: 14.5 oz
- Water resistant and applies with a smooth, buttery texture with little or no tackiness
- High level antiwear performance
- Superior rust and corrosion protection
- Excellent demulsibility as one of the most water-resistant food-grade greases
- Contains Micronox, a technology developed with unsurpassed performance in preserving and protecting food-grade lubricants from microbial contamination
- Package Quantity: 10 tubes/box

SKU

J00801052




## HYDRANT FLUSHING SIGNS

- Double-sided signs provide a courtesy advisory to customer
- Yellow caution warns traffic and pedestrians
- Rugged polyethylene construction
- Size: 20" H x 12" W
- Color: Yellow
- Lettering: CAUTION – HYDRANT FLUSHING TODAY

SKU

APFR618

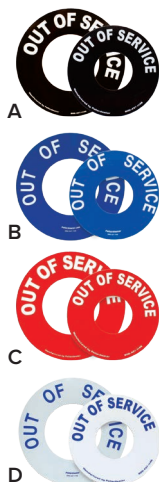

## "OUT OF SERVICE" DISKS

- Visually identifies unusable hydrants
- Warns against hookup in cases of emergency
- Durable HDPE is unaffected by abuse or severe temperature changes
- Highly visible graphics are easy to read
- Lettering: OUT OF SERVICE

- Smaller disks fit 2-1/2" hydrant nozzles and larger disks fit 4" or 4-1/2" hydrant nozzles

	SKU	ID	OD	Thickness	Color Disk/Lettering
A	PP68501	3-1/8"	7-1/2"	0.035"	Black/White
B	*PP68505	3-1/8"	7-1/2"	0.035"	Blue/White
C	PP68507	3-1/8"	7-1/2"	0.035"	Red/White
D	PP68503	3-1/8"	7-1/2"	0.055"	Reflective White/Blue
A	PP68502	5-3/4"	11"	0.035"	Black/White
B	PP68506	5-3/4"	11"	0.035"	Blue/White
C	PP68508	5-3/4"	11"	0.035"	Red/White
D	PP68504	5-3/4"	11"	0.055"	Reflective White/Blue

Pollardwater



## FOOD-GRADE LUBRICANTS

- Use on all types of pipe thread to prevent rust, corrosion and seizing
- Great for lubricating hydrant threads when pressure testing or flushing
- Meets FDA 21 CFR requirements

SKU	Size	Type
PPWC134	8 oz	Brush Top Lid
PP67751	16 oz	Brush Top Lid
PP67752	11 oz	Aerosol Spray



## HEAVY-DUTY "HYDRANT OUT OF SERVICE" BAGS

- Super durable, reusable and construction site tough
- Custom bags available
- Weather proof out-of-service bags fit over most hydrants
- Secure bag to hydrant by using the eyelets at bottom of the bag
- Lettering: HYDRANT OUT OF SERVICE
- Material: Fiber reinforced vinyl
- Sold individually

SKU	Color
PP69201	Yellow with Black Lettering
PP69202	Red with White Lettering
PP69203	Orange with Black Lettering



DELIVERING QUALITY SINCE 1837

**Pollardwater**


**NEW**



## CHLORPRO SERIES CHEMICAL INJECTOR

- Chlorinate and dechlorinate with one device
- Designed for new water main disinfection projects with high level chlorine concentrations
- Chlorinate using Calcium Hypochlorite 65% or Sodium Hypochlorite 12.5% solutions
- Dechlorinate using liquid Captor® (Calcium Thiosulfate)
- Flow Rate: 100-400 gpm (Bluetooth)
- Easy-to-use digital push button settings
- 120 VAC power required
- Includes carry case

SKU	Type
POLCP50	ChlorPro 25-50 PPM
PCPU100	ChlorPro Ultra 50-100 PPM
ANAHYPO1255	Sodium Hypochlorite 5 Gal
PCAPTOR5	CAPTOR® 5 Gal



SHOP ALL OF THESE PRODUCTS  
AND MORE AT **POLLARDWATER.COM**.



**Pollardwater**

TAKE ADVANTAGE OF FREE SHIPPING ON  
ONLINE ORDERS—ALL DAY, EVERY DAY\*.

**POLLARDWATER.COM**

\*Free standard ground shipping for online orders in the contiguous U.S. Some exclusions may apply.  
Prices valid at time of publication but are subject to change without notice.

©2021 Ferguson Enterprises, LLC 0621 2777209

powered by  
**FERGUSON**